





SNG Generator - New PA Package

- Ⓢ Mixing propane with air to create a **synthetic gas** identical to city gas.
- Ⓢ **Easy** operation. Touch the screen to start-up with the audio guidance.
- Ⓢ For your **safety** and **security**, automatically performs gas leakage test.

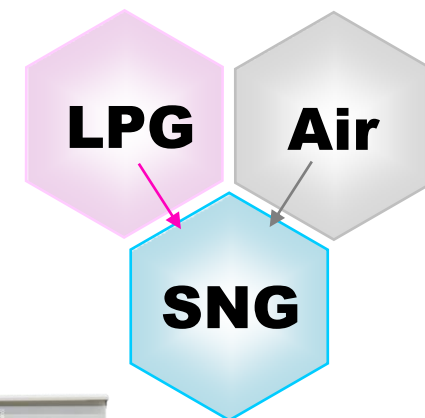

Audio Guidance



Control Panel

Touchscreen



Technical Data

Generated Gas	Total Calorific Value	62.80 MJ/m ³ (normal) (15000 kcal/m ³ (normal))
	Tolerable Range of Calorific Value	61.15~63.77 MJ/m ³ (normal) (14600~15300 kcal/m ³ (normal))
Feeder Gas	LPG Containing 95% or More Propane	
Capacity	8m ³ /h (normal) (139.6kW)	
Outlet Pressure	1.50~2.50 kPa	
Power Consumption	40 W	
Product Weight*	Approx. 140kg	
External Dimensions (mm)*	W1,100 x D652 x H937	
Installation Site	Outdoor	

*Main unit only




New PA Package

Safety Purging System

Removing gas component and odorant from the mixed gas.
Purge the generated gas safely to the atmosphere, to keep the gas density within correct range for the internal piping of the New PA Package.

One-Way Lock Valve

It switches gas supply from city gas sourced to generated gas by New PA package. To prevent improper valve operation occurring, a locking panel fixes a valve in closed status should another valve be opened at the same time.

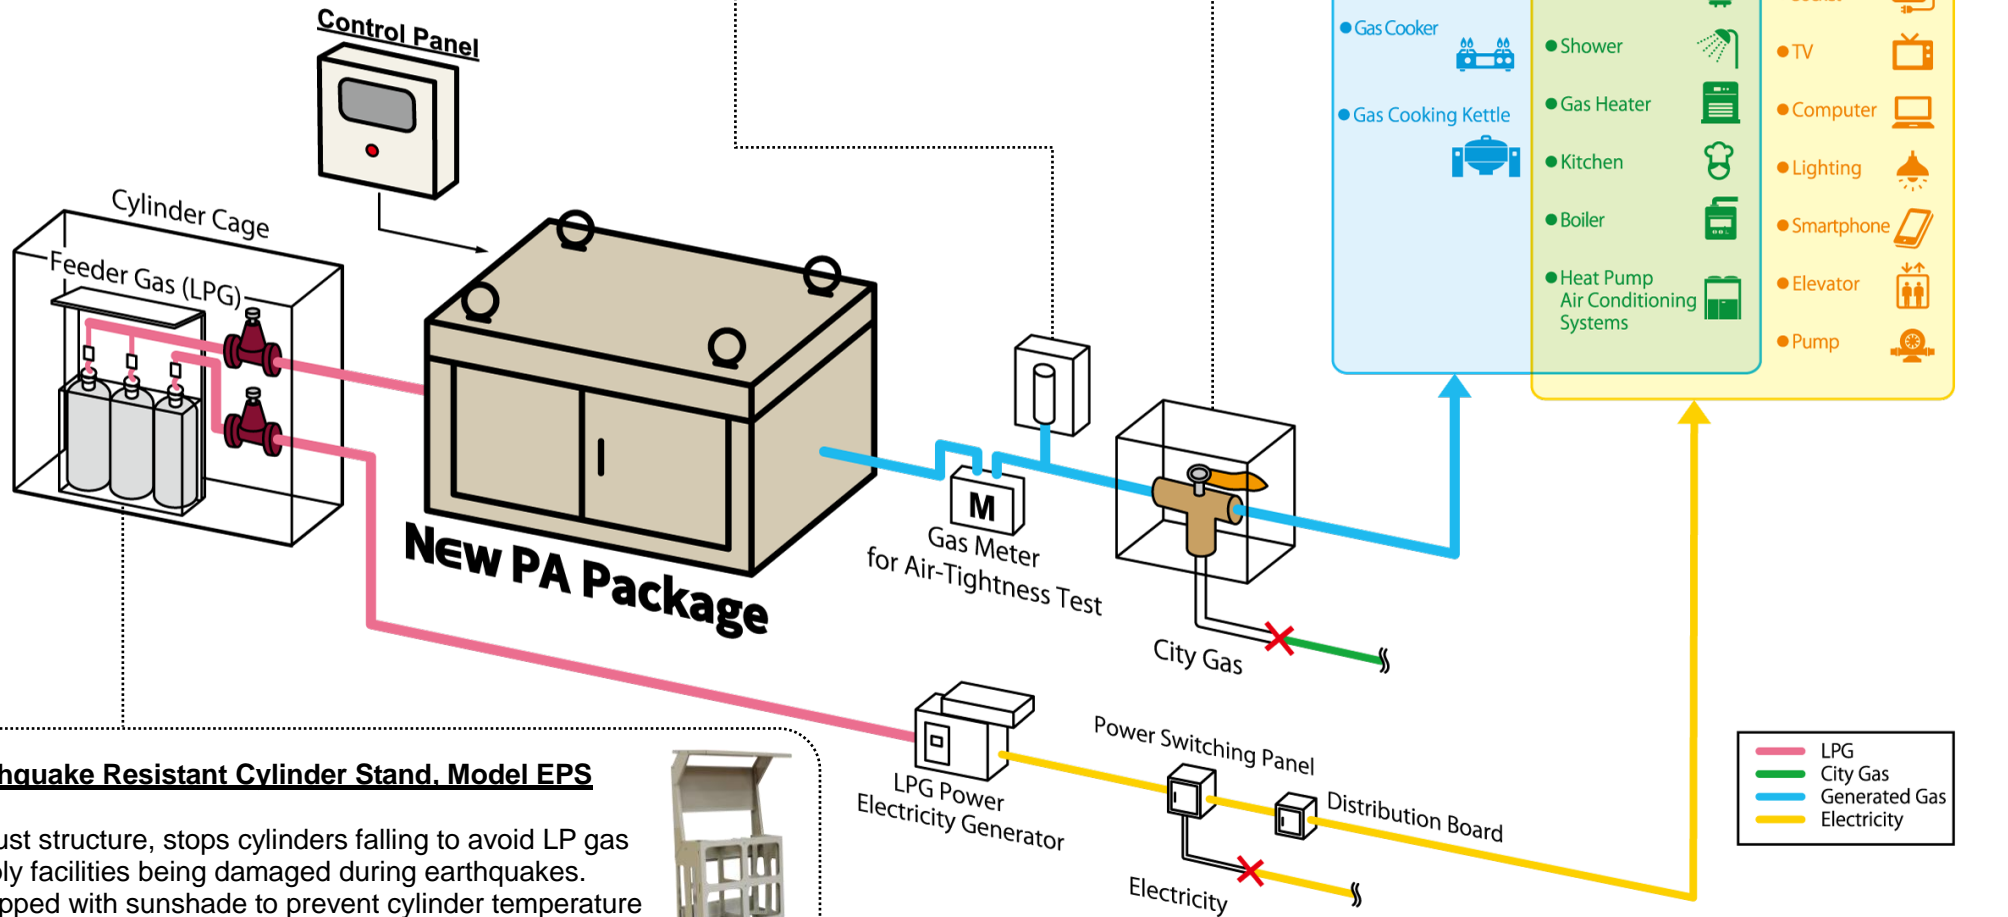

Earthquake Resistant Cylinder Stand. Model EPS

Robust structure, stops cylinders falling to avoid LP gas supply facilities being damaged during earthquakes. Equipped with sunshade to prevent cylinder temperature increase from direct sunlight.

